


Machine Series: KPE-Eco

Case Sealers (Semi-automatic)



**Production Speed:
Up to 30 pcs / min**

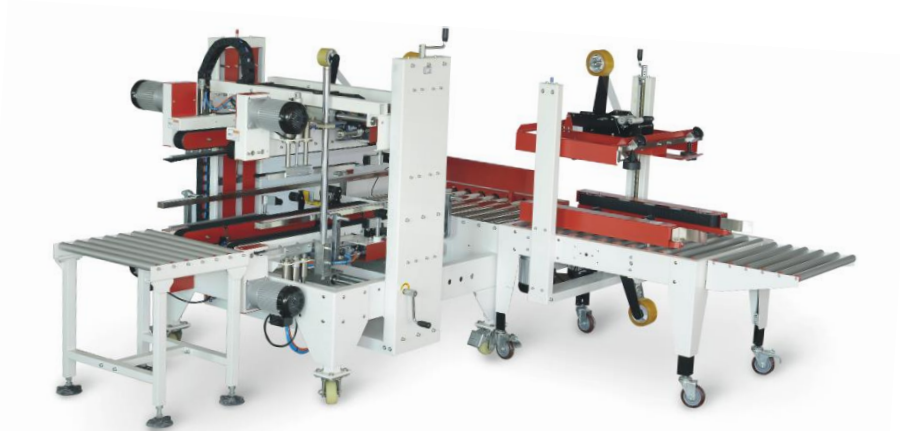

Machine Information:

- Easy to maintain, low spare parts costs
- Adjustable tape tension
- 2 adhesive tape dispensers (top / bottom)
- Fast format change by hand wheel or light barrier technology
- Including product infeed and outfeed roller conveyor
- Self-adhesive tapes with 50mm width (optional 75mm)
- Conveyor belt running direction (right / left)
- Height adjustable feet on castors



Model	KPE-FA500	KPE-SDH500	KPEX-FC500	KPEX-FE500
Applicable tapes:	PP, PVC, Hotmelt	PP, PVC, Hotmelt	PP, PVC, Hotmelt	PP, PVC, Hotmelt
Max. tape diameter:	410 mm	410 mm	410 mm	410 mm
Tape roll holder:	76 mm	76 mm	76 mm	76 mm
Min. case dimensions (W x H):	120 x 130 mm	90 x 120 mm	120 x 120 mm	120 x 130 mm
Max. case dimensions (W x H) ² :	500 x 500 mm	500 x 500 mm	500 x 500 mm	500 x 500 mm
Machine size (L x W x H) in mm:	1000 x 900 x 1270	1000 x 930 x 1270	1000 x 930 x 1270	1000 x 900 x 1270
Max. case weight (approx.):	40 kg	40 kg	40 kg	40 kg
Arrangement of the drive belts:	Lateral, left + right	Lateral, top + bottom	Lateral, left + right	Lateral, left + right
Case format adaption:	manual	manual	automatic	automatic
Transport speed:	20 m / min	20 m / min	20 m / min	20 m / min
Supply voltage:	230V	230V	230V	230V
Air pressure (dry air):	-	-	6,0 bar / 40 L/min	6,0 bar / 80 L/min
Max. connected load:	0,40 kW	0,45 kW	0,45 kW	0,40 kW
Machine weight (approx.):	130 kg	200 kg	190 kg	140 kg